


Constant Current LED Driver

Features:

- Independent compact design
- Constant current driver
- Universal AC input
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II

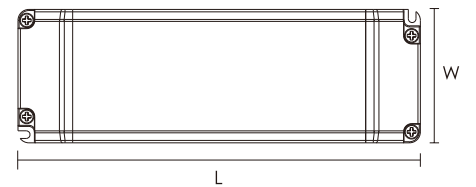

Parameters:

Input voltage	Max. output	Output current	Output voltage	Power factor	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
(V)	(W)	(mA)	(V)	(λ)	(%)	(W)	ta (°C)	tc (°C)		(mm)	(g)
100-240	40	1000	3-40	0.95	87	<1.0	-20...+50	80	SELV	166x52x24	190