


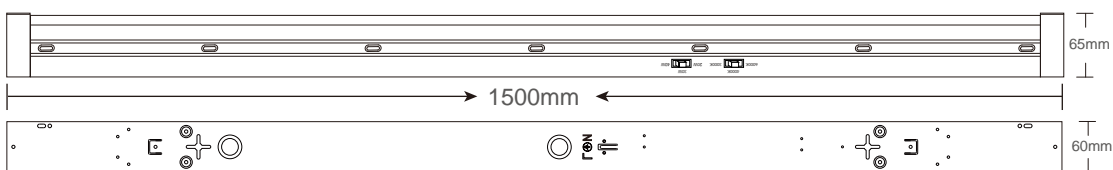

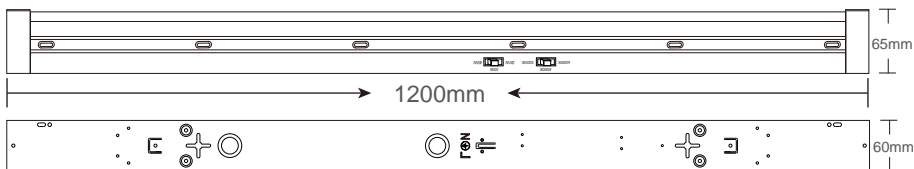

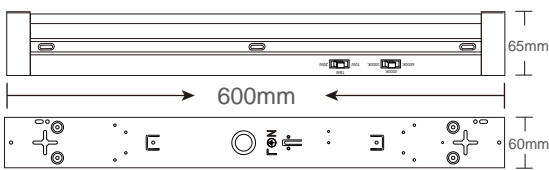


Tri-wattage LED Batten

AU02-BAT Series

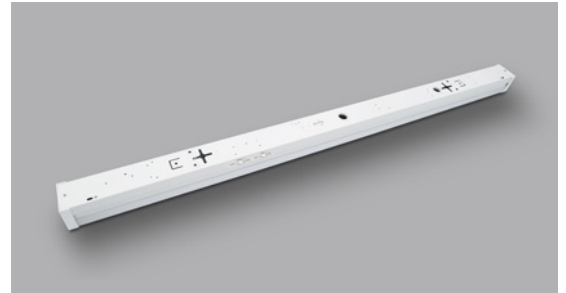

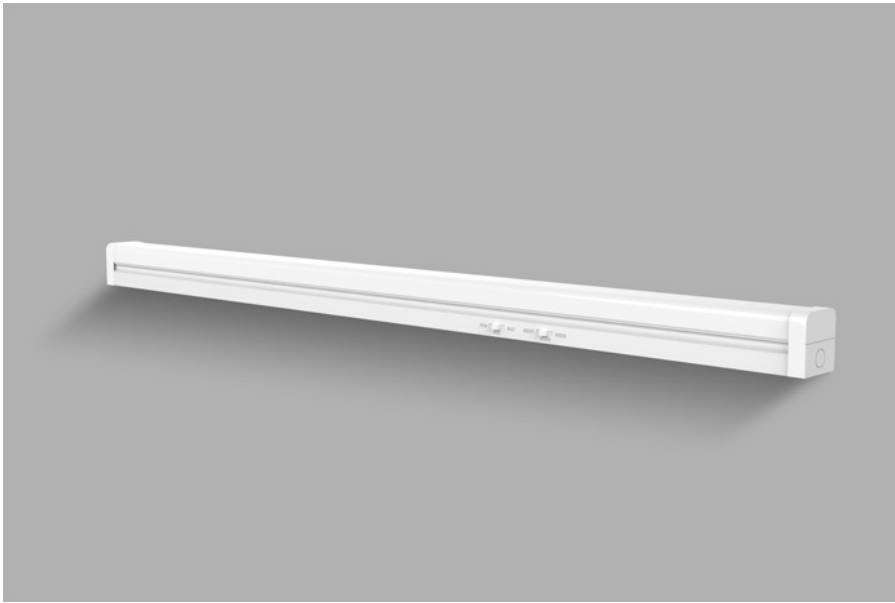

General Features:

- Tri-wattage selectable by dip switch before installation
- Tri-color selectable by dip switch available
- Wire from back or two ends, with big entry hole
- Big Terminal Block or Quick play & plug connector, easy installation
- LED Replaceable board, very even light distribution
- Suspension strap attached to the lamp & base part, makes installation easier
- Can be Surface Mounted or Suspended
- Can be linked one to another, end by end, without gap
- CE, Rohs, SAA & C-tick approved

Technical Specifications

Model No.	AU02-BAT203040W4F3C	
600*60*65	1200*60*65	
Cutout(mm)	/	/
Wattage(w)	20W-30W-40W	
Input Voltage(v)	AC220~240V	
Light Source	SMD2835	
SDCM	<6	
CCT(K) 3 CCT	3000K-4000K-6000K or as per your requirement	
Luminous Flux (lm)±5%	2300-5600	
CRI	>80Ra	
Beam Angle(°)	120°	
Dimming option	Non-dimmable, Flicker Free	
Sensor option	Available	
Emergency Kits	Available	
Protection Class	Class I	
Degree of protection(IP)	IP20	
Impact Resistance(IK)	IK08	
Material	Base	Iron
	Heatsink	PC
	Diffuser	PC
L70	>54000Hrs	
Glow Wire Test(°C)	650°C	
Operation Temp.(°C)	-20~ 45°C	
Installation	Surface Mounted / Suspended	
Certificates	CE, Rohs, SAA & C-tick	
Warranty	3 Years	


Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU02-BAT203040W4F3C	1.60	1	1215*70*75	1.8	6	122*22.5*17	11.3	3222	7332	8412


Installation Instructions

Step 1:

Turn off the power supply, slide the end caps, remove the LED diffuser part from the base housing
Select the suitable CCT & Wattage by dip switch

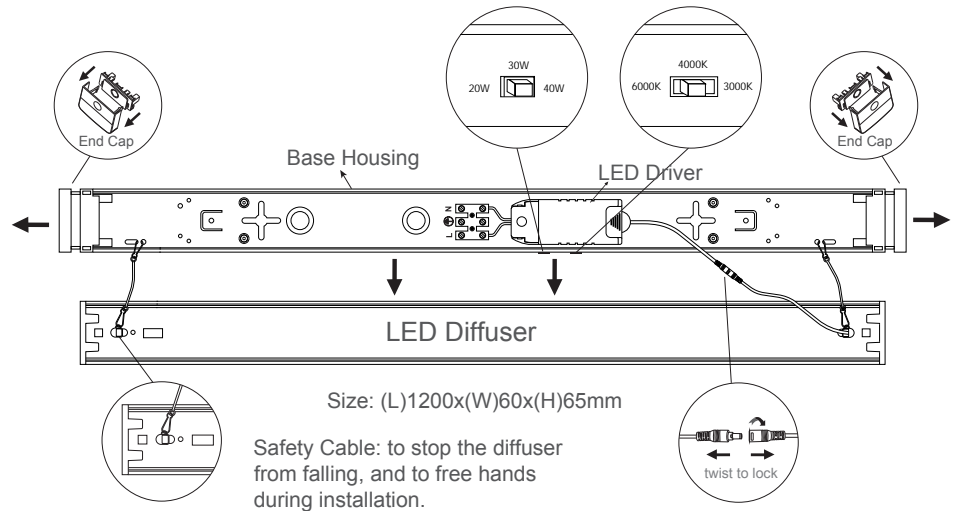


Step 2: Mount the fitting onto ceiling with wall plugs and screws

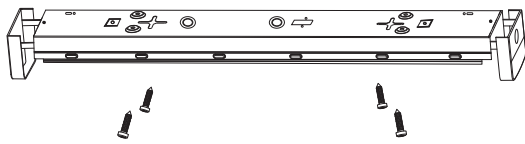


Surface Mounted

Step 2: Secure the mounting bracket to the steel cable

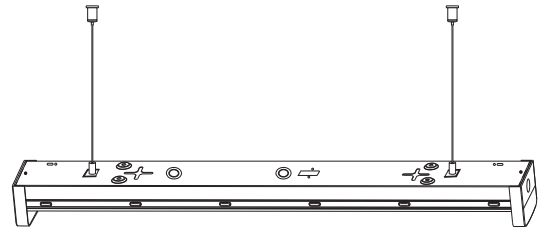


Suspended Mounted

Step 3: Wire the cable into the terminal block through the cable entry hole Insert connector between the base and diffuser; Assemble the diffuser back to the base and also the two caps.

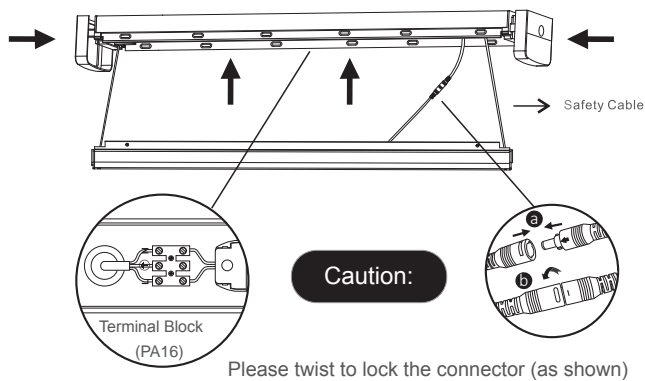

Step 4: Turn on the power supply to ensure the luminaire is working properly.



Packing List (each inner box)

LED Batten	1piece
Screw	4pcs
Wall Plug	4pcs

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Warehouses
- Supermarkets
- Shopping Malls
- Office Buildings
- Workshops
- Car Parks