

# PAN PNB CT

Commercial Lighting / Backlit Panel Light

PNBW450CT (5000K)



DAVISLIGHTING



## Features

- Switchable colour temperature
- Uniform light effect
- Integrated steel plate design provides excellent thermal management
- Concise design offers high performance
- Remote driver
- Various mounting methods
- Available in dimming version

## Applications

- Offices / meeting rooms
- Schools
- Hospitals
- Laboratory / Dust-free workshop


## Options

- Surface Mount Kit
- Plaster Frame Kit
- Suspension Kit

## Standards

Manufactured under ISO 9001:2015 to standards  
IEC/AS/NZS 60598.1  
IEC/AS/NZS 60598.2.2  
IEC/AS/NZS CISPR 15

## Mounting Methods

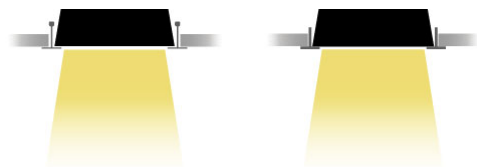

T-Bar Lay-in

Plaster Recessed



Surface mounted

Suspension



# PAN PNB CT



## Commercial Lighting / Backlit Panel Light

### Specifications

Model	PNBW450CT (5000K)
Nominal Power (W)	50
Input Voltage (V)	200-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	6127
Luminaire Efficacy (lm/W)	124
CRI (Ra)	>80
Power Factor	>0.90
SDCM	<5
CCT (K)	5000
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +40
Weight (kg)	2.5
IP Rating	40

### Packaging Details

Model	PNBW450CT (5000K)
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	1199 x 52 x 628
Product Carton Weight (kg)	4.66
Master Carton Qty per box (pc)	4
Master Carton Dimension (mm)	1208 x 223 x 647
Master Carton Weight (kg)	18.64


# PAN PNB CT

Commercial Lighting / Backlit Panel Light



## Lighting Data

## Dimensions

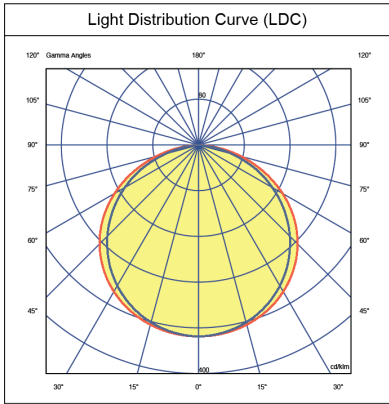

All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.