

BERDIS 150-200W LED HIGHBAY



Description

The lighting fitting is a high performance low profile lowbay supplied with quality transformer and chips. Its high performance LEDs and IP44 rating ensure very low maintenance and long life. Ideal for factories, warehouses and farms

Ideal for:


- Service station canopies
- Car parks
- Retail areas
- Farms
- Manufacturing facilities
- Warehouses & storage



Features

- Low profile
- Light output -2 options:
 - 150-watt -19,500 Lumens
 - 200-watt -26,000 Lumens
- IP44 rated
- Colour rendering (CRI): > 80
- Colour temperature: 5500K
- LEDs expected average life: 50,000 hours
- Comes with AU Plug and flex light distribution and glare control
- Fully gasketed lens fixed to the body minimising the ingress of dust, moisture and insects
- Diffuser secured with stainless steel screws and wire lanyard
- Easy to install
- Reduced maintenance costs

PHOTOMETRIC DIAGRAM

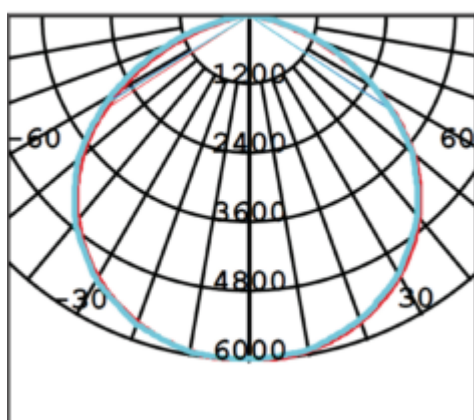

Product details:

Supply Voltage	240-265V
Supply Frequency	50-60Hz
Cable	1.2M Flex&Plug
Body	Aluminium
Diffuser	PC
Driver	Fixed Remote
Weight	G.W : 5.1kgs
	N.W : 4kgs
Ambient Temp	-30°C - 60°C
Avg. lifetime	≥60,000 hrs@ ta 55°C