


COLOR CHANGING LED DOWNLIGHT

These general purpose LED light fitting are designed with robust polycarbonate fitting. The fitting are suitable for a range of home lighting or commercial applications. The fittings are dimmable to give even further flexibility in lighting control.

Product Code	Voltage (V)	Wattage (W)	Power Factor	Luminous Flux (Lm)	Beam Angle	CRI	Colour temp	Dimmable
BTD0CC-12W	240V AC	12W	>0.85	88lm/w-cw	120	>80	5500K 4000K 3000K	Yes

Product features:

- Switchable between Warm White (3000K), Cool White (4000K) & Daylight (5500K)
- Polycarbonate front fascia ring with acrylic diffuser
- Fixed head downlight
- Rated for IP44 including wet area
- High efficiency LED SMD with quality integrated driver insulation
- Long life span of 35,000 hours
- AU Plug with flex

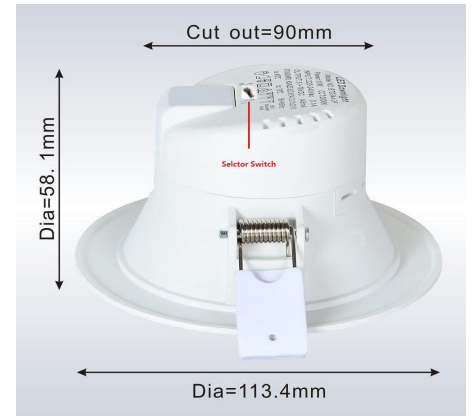

Distance (M)	BEAM ANGLE 120 DEG	
	Avg/Max (lux)	Diameter (M)
1	84	3.39
1.5	37	5.09
2	21	6.79
2.5	14	8.48
3	9	10.18



Cool White
5500K



Bright white
4000K



Warm white
3000K