

# CLOUR CHANGING LED DOWNLIGHT


These general purpose LED light fitting is designed with robust polycarbonate fitting for the budget cost. The fitting is suitable for a range of home lighting or commercial applications. The fitting is also dimmable to give even further flexibility in the lighting control

Product Code	Voltage (V)	Wattage (W)	Power Factor	Luminous Flux (Lm)	Beam Angle	CRI	Colour temp	Dimmable
BTD0CC-12W	240V AC	12W	>0.85	88lm/w-cw	120	>80	5500K 4000K 3000K	Yes

\*Available in robust aluminium finish and polycarbonate fitting for the budget conscious

## Product features:

- Switchable between Warm White (3000K), Cool White (4000K) & Daylight (5500K)
- Rated for IC
- Available in white and brushed chrome trim
- IP 44 including wet area
- High efficiency LED SMD with quality integrated driver insulation
- Long life span of 35,000 hours
- AU Plug with flex

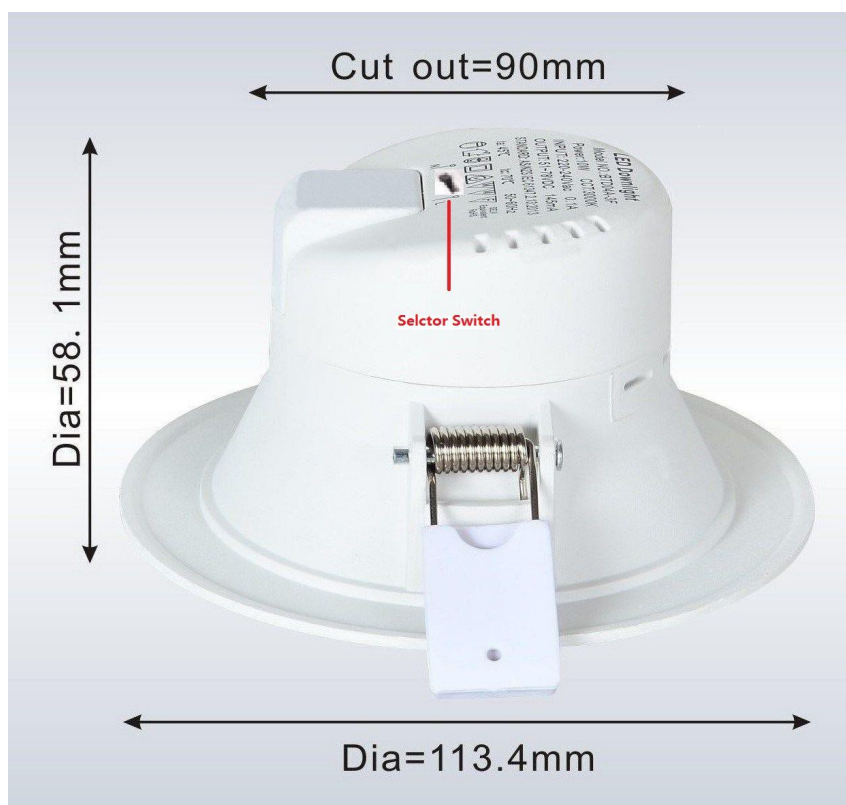

Distance (M)	BEAM ANGLE 120 DEG	
	Avg/Max (lux)	Diameter (M)
1	84	3.39
1.5	37	5.09
2	21	6.79
2.5	14	8.48
3	9	10.18



Cool White  
5500K



Bright white  
4000K



Warm white  
3000K