

# FLORYN FLA

Exterior Lighting / Flood Light

FLORYN FLA-FLA30G15K



DAVISLIGHTING

## Features

- Die-cast aluminium body
- Low energy consumption
- Rubber supply cable
- Fast turn-on, near zero maintenance
- Adjustable mounting bracket


## Applications

- Plazas
- Courtyards
- Factories, warehouses
- Gardens, parks
- Sporting venues

## Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.5
- IEC/AS/NZS CISPR 15

## Mounting Methods



Trunnion



# FLORYN FLA

Exterior Lighting / Flood Light



## Specifications

Model	FLA30G15K
Nominal Power (W)	30
Input Voltage (V)	220 - 240 VAC 50 / 60 Hz
Luminous Flux (lm)	3000
Efficacy (lm/W)	95
CRI (Ra)	>70
Power Factor	>0.95
CCT (K)	5000
Rated Life L70B50 (hr)	30000
Ambient Temp. ta (°C)	40
Weight (kg)	0.75


## Packaging Details

Model	FLA30G15K
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	158 x 45 x 190
Master Carton Qty per box (pc)	24
Master Carton Dimension (mm)	340 x 290 x 410
Master Carton Weight (kg)	22.5


# FLORYN FLA

Exterior Lighting / Flood Light

## Lighting Data

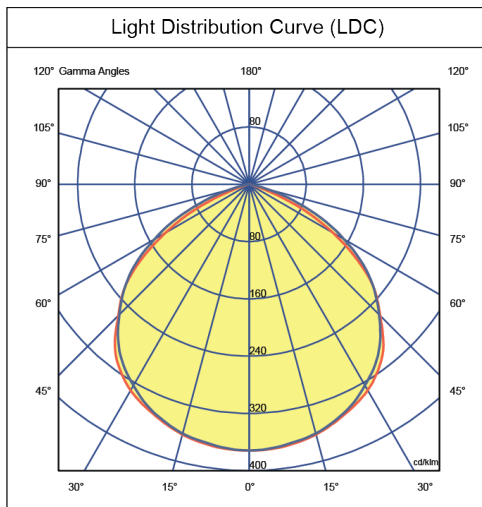

## Dimensions

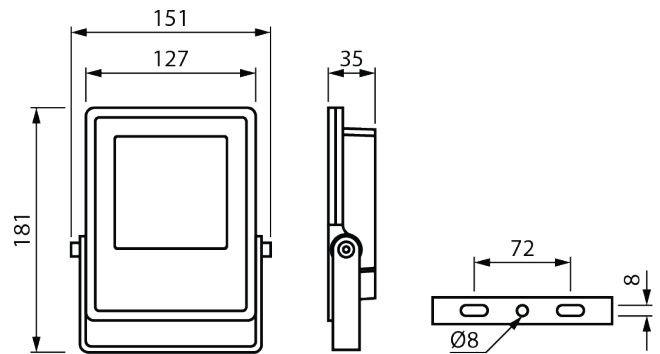

davislighting.com



davislighting.com.au

All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 10-02-2021  
Copyright © 2021 Davis Lighting. All Rights Reserved.