

PAN PNB CT

Commercial Lighting / Backlit Panel Light

PNB430CT (5000K)



DAVISLIGHTING



Features

- Switchable colour temperature
- Uniform light effect
- Integrated steel plate design provides excellent thermal management
- Concise design offers high performance
- Remote driver
- Various mounting methods
- Available in dimming version

Applications

- Offices / meeting rooms
- Schools
- Hospitals
- Laboratory / Dust-free workshop

Options

- Surface Mount Kit
- Plaster Frame Kit
- Suspension Kit

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

Mounting Methods



T-Bar Lay-in

Plaster Recessed



Surface mounted

Suspension



PAN PNB CT

Commercial Lighting / Backlit Panel Light

Specifications

Model	PNB430CT (5000K)
Nominal Power (W)	30
Input Voltage (V)	220-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	3411
Luminaire Efficacy (lm/W)	116
CRI (Ra)	>80
Power Factor	>0.90
SDCM	<5
CCT (K)	5000
Luminaire Rated Life (hr)	50000
Operating Temp. (°C)	-20 to +40
Weight (kg)	2.5
IP Rating	40


Packaging Details

Model	PNB430CT (5000K)
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	1197 x 52 x 314
Product Carton Weight (kg)	2.53
Master Carton Qty per box (pc)	4
Master Carton Dimension (mm)	1206 x 223 x 333
Master Carton Weight (kg)	11.1

PAN PNB CT

Commercial Lighting / Backlit Panel Light

Lighting Data

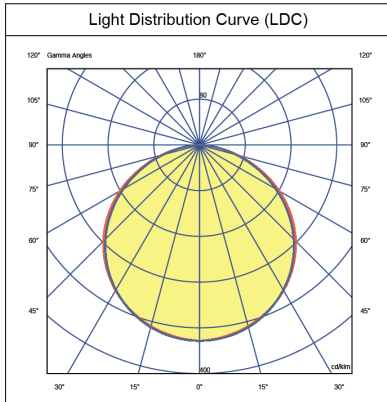

Dimensions



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.